



























A group of door panels stamped in PVC (white) or in ABS (veneers). ABS is a very resistant material to impacts and highly reflecting UV rays. It has very good thermal insulation properties, and at the same time does not deform when temperatures are changing. Both materials are of high quality and have a long aging period. Suitable for modern and classical constructions. What makes this product the most popular in its series are: competitive price, short realization.

PARAMETERS:

- standard dimensions: 850 x 2000 x 24/28/36/44 mm;
- ther is the possibility of using waterproof plywood reinforcement (a solution recommended especially for dark colors);
- All models are available as standard in 18 differents venners, white color and the white creme 9001, dyed in the mass;
- 13 different glasses: Thermofloat, VSG 3.3.1, Satinato, Chinchila clear, Chinchila bronze, Mastercarre, Masterpoint, Reflex bronze, Delta clear, Delta bronze, Delta Mat, Crepi and Flutes.



DOORS PRESENTED FROM THE OUTSIDE

BL-01(2)





BL-01

BL-02(2)



BL-02(8)



BL-02(2)S

BL-02





BL-03(1)



BL-03



DOORS PRESENTED FROM THE OUTSIDE

BL-04(1)



BL-07(1)



BL-07(3)



BL-04



BL-05(1)







BL-05

DOORS PRESENTED FROM THE OUTSIDE









BL-13(1)





DOORS PRESENTED FROM THE OUTSIDE

BL-13



BL-14(1)



BL-14












BL-17



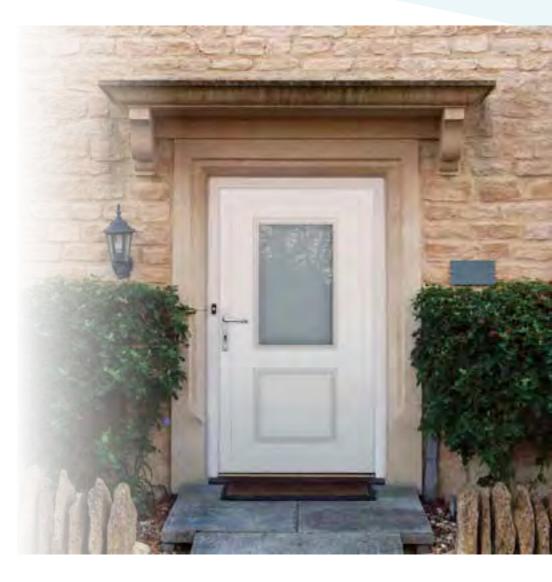



DOORS PRESENTED FROM THE OUTSIDE



DOORS PRESENTED FROM THE OUTSIDE

BL-25(3)







DOORS PRESENTED FROM THE OUTSIDE



BL-28







DOORS PRESENTED FROM THE OUTSIDE

RANGE OF COLORS

Due to the technical stamping, the serie BASIC Line have is own range of colors based on the RENOLIT and hereafter listed. the colors may slightly vary from those RAL and RENOLIT veneer numbers.



Available glazings page 29-132



al and the second



9



Economic door panels which combine aesthetics, high quality and current trends in modern door design. Competitive prices are also a great advantage. All the glass elements are maintained by stainless steel application. The extraordinary precision is possible to obtain thanks to applying laser treatment technology. To differentiate it from our other models we marked it with letter "A. It is our flagship model which is most popular in Germany and France. Its main advantage is quick realisation time.



PARAMETERS ALU:

- standard dimensions
- 900 x 2000 x 24/28/36/44 mm,
- construction: 1,5/21/1,5
 - 1,5 mm aluminum sheet
- 21,00 mm rigid polyurethane foam
- 1,5 mm aluminum sheet.

PARAMETERS PVC:

- standard dimensions
- 900 x 2000 x 24/28/36/44 mm,
- construction: 2,0/20/2,0
- 2,0 mm PVC plate
- 20,00 mm rigid polyurethane foam
- 2,0 mm PVC plate.

DOORS PRESENTED FROM THE OUTSIDE





EK-02(A) SAND 03







EK-02(A)



EK-02(A) SAND 08

EK-02(A) SAND 01



EK-03(A)



EK-04(A) SAND 04



EK-02(A) SAND 02



EK-04(A)



EK-04(A) SAND 05



DOORS PRESENTED FROM THE OUTSIDE

EK-04(A) SAND 06



EK-07(A)



EK-08(A)

EK-05(A)



EK-09(A)





EK-10(A)



EK-11(A)





EK-12(A)











DOORS PRESENTED FROM THE OUTSIDE

EK-13(A)



EK-17(A)



EK-21(A)



EK-14(A)



EK-18(A)



EK-22(A)



EK-15(A)



EK-19(A)



EK-23(A)



EK-16(A)



EK-20(A)



EK-24(A)



DOORS PRESENTED FROM THE OUTSIDE

EK-25(A)



EK-29(A)





EK-30(A)

EK-27(A)



EK-28(A)







EK-31(A)





EK-32(A)



DOORS PRESENTED FROM THE OUTSIDE

EK-33(A)



EK-34(A)





EK-36(A)



EK-37(A)



EK-38(A)





DOORS PRESENTED FROM THE OUTSIDE

EK-39(A)



EK-43(A)



EK-47(A)



EK-40(A)



EK-44(A)



EK-48(A)



EK-41(A)



EK-45(A)



EK-48(A) SAND 10



EK-42(A)



EK-46(A)



EK-49(A)



DOORS PRESENTED FROM THE OUTSIDE

EK-50(A)



EK-52(A)

EK-50(A) SAND 09



EK-53(A)

EK-51(A)



EK-51(A) SAND 09









RANGE OF COLORS

Above series are available in each and every colour: RAL, decoral and veneers Renolit, Cova or Hornschuch.

The entire range of RAL colours. Paint manufacturer may be choosen according to customers' needs.

EXAMPLE OF THE MOST POPULAR COLORS



Golden oak, nr 2178001



Anthracit gray smooth, nr 701605-083



Winchester, nr 49240

DOORS PRESENTED FROM THE OUTSIDE

EXAMPLE OF THE MOST POPULAR COLORS



White smooth, RAL 9016

Alux, DB 703 436-1014



Anthracit gray with wood structur, nr 701605-167



Walnut, nr 2178007



Natural oak, nr 3118 076



Chocolate Brown, nr 887505-167

Available glazings page 129-132





STANDARD STAINLESS STEEL APPLICATION







This is a group of extraordinary panels with or without glazing. It is characterized by an additional aluminium frame (extruded especially for company Veyna), which gives a pattern and hold the glass. This technology allows to replace the glass panel any time it should be required. These door panels go perfectly with classic and stylish architecture.



PARAMETERS:


- standard dimensions: 1000 x 2000 x 24/36/44 mm,
- available thickness: 24, 36 and 44 mm,
- construction: 2,0/20/2,0
- 2,0 mm milled aluminium plate
- 20,00 mm rigid polystyrene foam
- 2,0 mm milled aluminium plate.



DOORS PRESENTED FROM THE OUTSIDE







CL/F 11-S



CL/F 12



CL/F 12-S



CL-/K4-S





CL/F4





CL/F4-S







DOORS PRESENTED FROM THE OUTSIDE

CL/F5-S



CL/K6-S



CL/K8

CL/F6-S



CL/K6



CL/DW 8



CL/DW 8-S





CL/DW 9









DOORS PRESENTED FROM THE OUTSIDE





CL/DW 10

CL/F 14

CL/DW 10-S

CL/F 14-S





CL/F 15



CL/F 15-S





CL 18-S





CL/F 16





CL/F 16-S



DOORS PRESENTED FROM THE OUTSIDE



CL/H 19S





CL 16A1

CL/F 17-S



CL/H 18S



CL 16A3







CL 16A2





RANGE OF COLORS

The entire range of RAL colors. Paint manufacturer may be choosen according to Customers needs.




Available glazings page 129-132





NEW LINE (ALU)

NEW LINE (ALU) NEW LINE EK (ALU/PVC)



In order to meet the latest trends in architecture, we have designed door panels of modern shapes. New Line with glazed elements and grooves as well as NEW LINE EK without grooves with a possibility to make it in white PVC which can be covered with any colour from RAL palette. Possibility to choose from all range of colours creates huge potential for customers who would like to have individual approach in their households.



PARAMETERS:

- standard dimensions: 1000 x 2000 x 24/28/36/44 mm,
- construction: 2,0/20/2,0
- 2,0 mm milled aluminum sheet
- 20,00 mm rigid polystyrene foam
- 2,0 mm milled aluminum sheet.



NEW LINE (ALU)

DOORS PRESENTED FROM THE OUTSIDE





NL 5-S



NL 9-S



NL 2-S



NL 6-S



NL 10-S



NL 3-S



NL 7-S



NL 11-S



NL 4-S



NL 8-S



NL 12-S



NEW LINE (ALU)

DOORS PRESENTED FROM THE OUTSIDE

NL 13-S



NL 17-M



NL/F 18

NL 15-M



NL/F 19

NL 16-M



NL/F 20



NL/F21





NL/F 22





NL/F 23






NL 24-S



NEW LINE (ALU)

DOORS PRESENTED FROM THE OUTSIDE

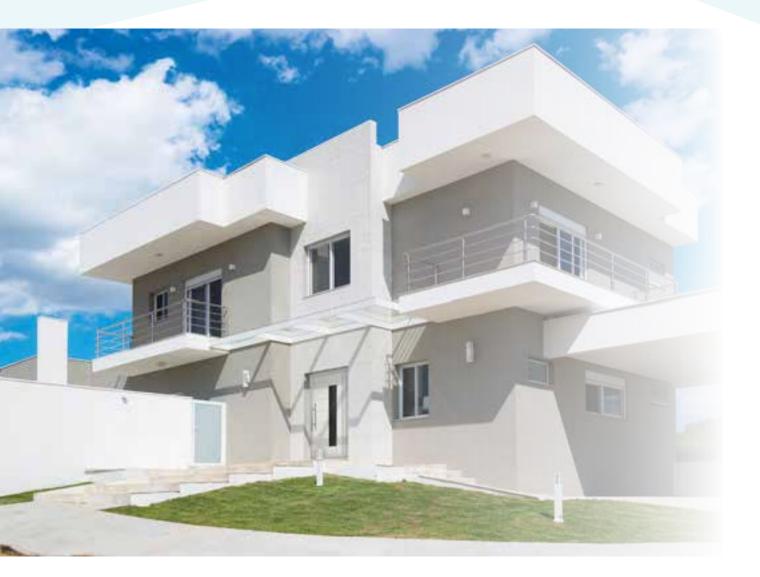









NL 28-S



NEW LINE (ALU)/NEW LINE EK (ALU/PVC)

DOORS PRESENTED FROM THE OUTSIDE

NL 29-S PIASEK



NL 33-S



NL-EK 9



NL 30-S



NL-EK 6

NL 31-S





NL-EK 7



NL-EK 11



NL-EK 8



NL-EK 12



DOORS PRESENTED FROM THE OUTSIDE











NL-EK 15





DOORS PRESENTED FROM THE OUTSIDE

NL-EK 17



NL-EK 21



NL-EK 22



NL-EK 20



NL-EK 24



NL-EK 25





NL-EK 26





NL-EK 27



1

NL-EK 28



NL-EK 30

DOORS PRESENTED FROM THE OUTSIDE

NL-EK 29



NL-EK 33





NL-EK 31





NL-EK 36



NL-EK 37





NL-EK 38





NL-EK 39

NL-EK 40



DOORS PRESENTED FROM THE OUTSIDE

NL-EK 41



NL-EK 42



NL-EK 43



NL-EK 44





RANGE OF COLOURS

The entire range of RAL colours. Paint manufacturer may be chosen according to customer's needs. For some models there is possibility to use veneer Renolit, Cova or Hornschuch.

Available glazings on page 29-132



Top-line door panels form the most exclusive line of the group. Top-line panels are produced in full version or with glass elements placed in panel with a help of aluminum frames. We use aluminum frames and cut patterns, which enables us to use thicker aluminum sheets. This provides more reinforcement and protection from burglary.





PARAMETERS:

- standard dimensions: 1000 x 2000 x 24/36/44 mm,
- available thickness: 24, 36 oraz 44 mm,
- construction: 2,0/20/2,0
 - 2,0 mm milled aluminium plate
 - 20,00 mm rigid polystyrene foam
- 2,0 mm milled aluminium plate.

DOORS PRESENTED FROM THE OUTSIDE



TL/DW 1-S



TL/DW 4-S



TL/DW 7





TL/DW 7-S



TL/DW 3



TL/DW 5



TL/F 1



TL/DW 3-S



TL/DW 5-S



TL/F 1-S



DOORS PRESENTED FROM THE OUTSIDE

TL/F 3-S



TL/MC 1



TL/MC 4



TL/F 4-S



TL/MC 1-S



TL/MC 4-S



TL/K 7





TL/MC 2



TL/MC 2-S



TL/MC 5



TL/MC 5-S




DOORS PRESENTED FROM THE OUTSIDE

TL/P 10









RANGE OF COLOURS

The entire range of RAL colours. Paint manufacturer may be cohosen according to customers needs.

Available Glazings on page 129-132











Extra-line panels are manufactured, only on a special request. Thanks to extremely durable structure, Extra-Line panels can be used for producing anti-burglary and bulletproof constructions. Produced only in the solid version, without glass elements. There is a possibility of using aluminium sheets of different thickness (2, 3, or 5 mm). This type of door is specially popular among customers who want to have a company logo or originally milled house number on the door. We are also able to mount any laser cut application from stainless steel should a customer wishes us to do so.



PARAMETERS:

- standard dimensions:
 - 1000 x 2000 x 24/28/36/44 mm ALU,
- construction: 3,0/20/1,5
- 3,0 mm milled aluminum sheet
- 20,00 mm rigid polystyrene foam
- 1,5 mm milled aluminum sheet,
- The milling is only on the outside. The inside is smooth.



DOORS PRESENTED FROM THE OUTSIDE





EX/6



EX/4

EX/8



EX/5

EX-SPECJAL 1





EX-SPECJAL 2







EX-SPECJAL 3



EX-SPECJAL 4



DOORS PRESENTED FROM THE OUTSIDE

EX-SPECJAL 5





RANGE OF COLORS

The entire range of RAL colours. Paint manufacturer may be cohosen according to customers needs.

Available Glazings on page 129-132





FASHION LINE (ALU)



FASHION LINE (ALU)

This is a group with a unique design and modern form. Ideal for customers with sophisticated taste who appreciate originality. We can find a variety of designs of geometric shapes and openwork accents. Very original visual effects may be achieved by combining it with different types of glazing.



PARAMETERS:

- standard dimensions: 900 x 2000 x 24/28/36/44 mm ALU,
- construction: 2,0/20/2,0
 - 2,0 mm milled aluminum sheet
 - 20,00 mm rigid polystyrene foam
 - 2,0 mm milled aluminum sheet.



FASHION LINE (ALU)

DOORS PRESENTED FROM THE OUTSIDE



FL-5



FL-6



FL-3

FL-7















RANGE OF COLOURS

The entire range of RAL colors. Paint manufacturer may be choosen according to customer needs.



Available glazings on page 129-132





This is an exclusive series of original, full glass fillings for demanding customers where digital printing is applied directly on the glass. In our offer we have many different digital printing projects from which you choose your own. Glass Line is characterized by unique design, long life, good properties thermal insulation and gives the door structure strength and stability.


For the most demanding customers, we also offer the opportunity to create your own project in order to have a unique tailor-made product.

PARAMETERS:

- standard dimensions: 900 x 2000 x 24/28/32/36 mm,
- maximal dimensions of the panels: 1300 x 2200 mm,
- Glazing composition: 44.2/warm frame/43.1TF

(Security glass 44.2 with printing/warm edge spacer/security glass with thermofloat),

- Panels weight depends of the chosen size: 75 to 120kg.

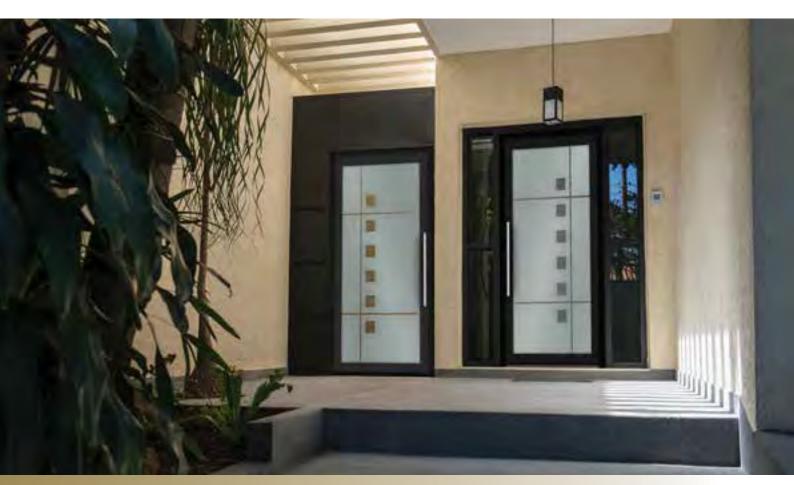

DOORS PRESENTED FROM THE OUTSIDE

GL-01





GL-03





DOORS PRESENTED FROM THE OUTSIDE

GL-04



GL-05





GL-06













DOORS PRESENTED FROM THE OUTSIDE



GL-14








DOORS PRESENTED FROM THE OUTSIDE

GL-16



GL-17





GL-18










GL-21



DOORS PRESENTED FROM THE OUTSIDE



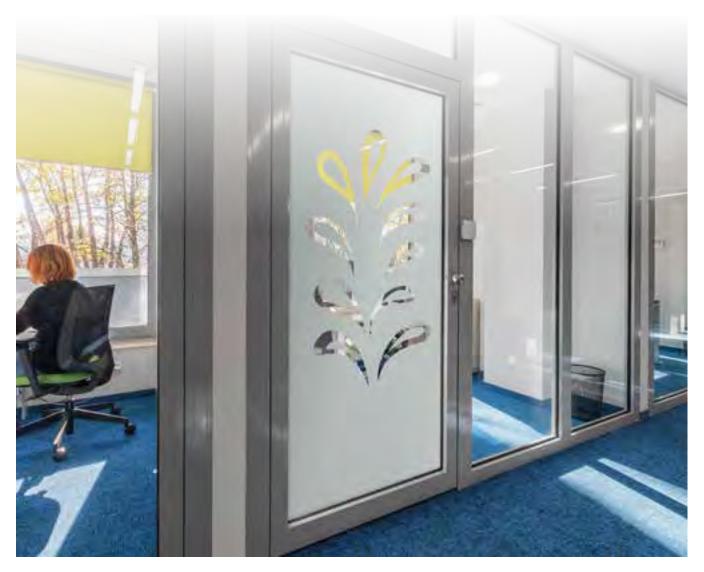

Contraction of the

111







DOORS PRESENTED FROM THE OUTSIDE







PL-04



PL-05





PL-06



DOORS PRESENTED FROM THE OUTSIDE



DOORS PRESENTED FROM THE OUTSIDE

PL-07



PL-08

















PL-12



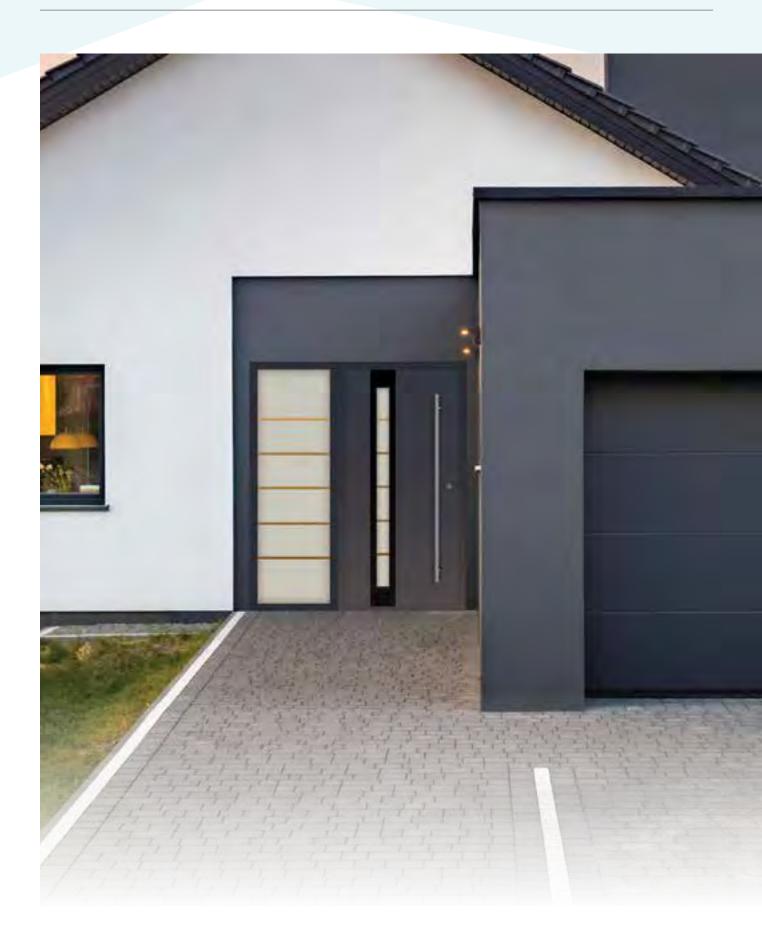

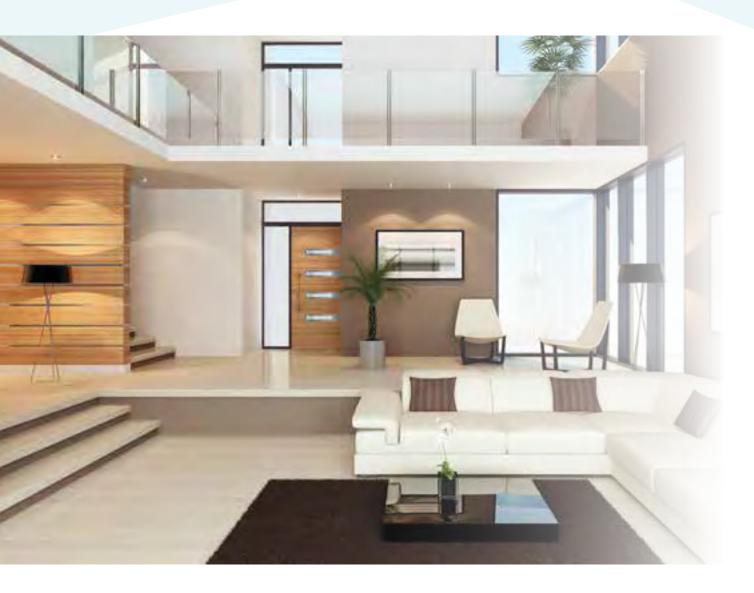













PL-16



DOORS PRESENTED FROM THE OUTSIDE

PL-17




PL-18



PL-19



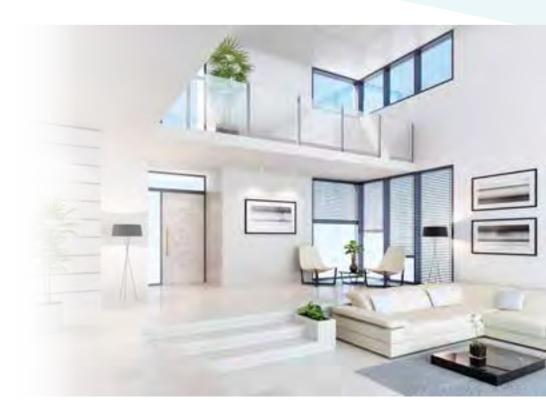








DOORS PRESENTED FROM THE OUTSIDE

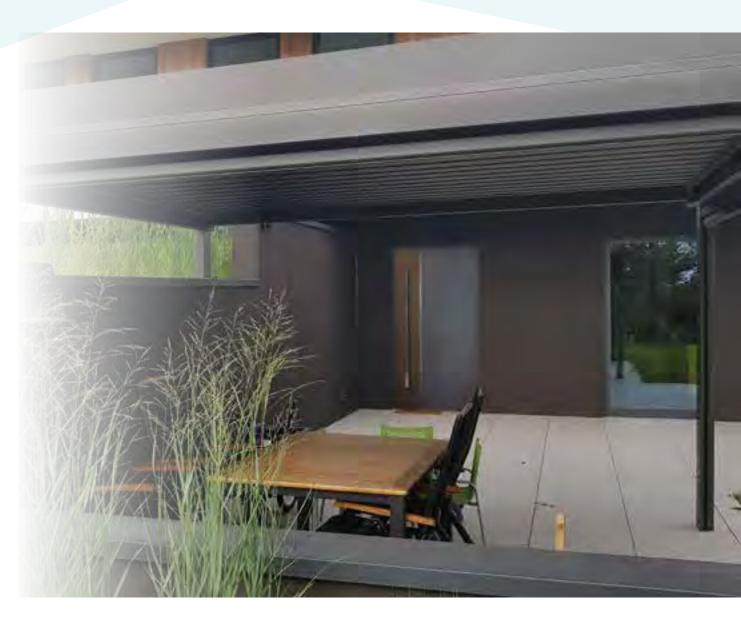













PL-27







DOORS PRESENTED FROM THE OUTSIDE



PL-28













PL-31



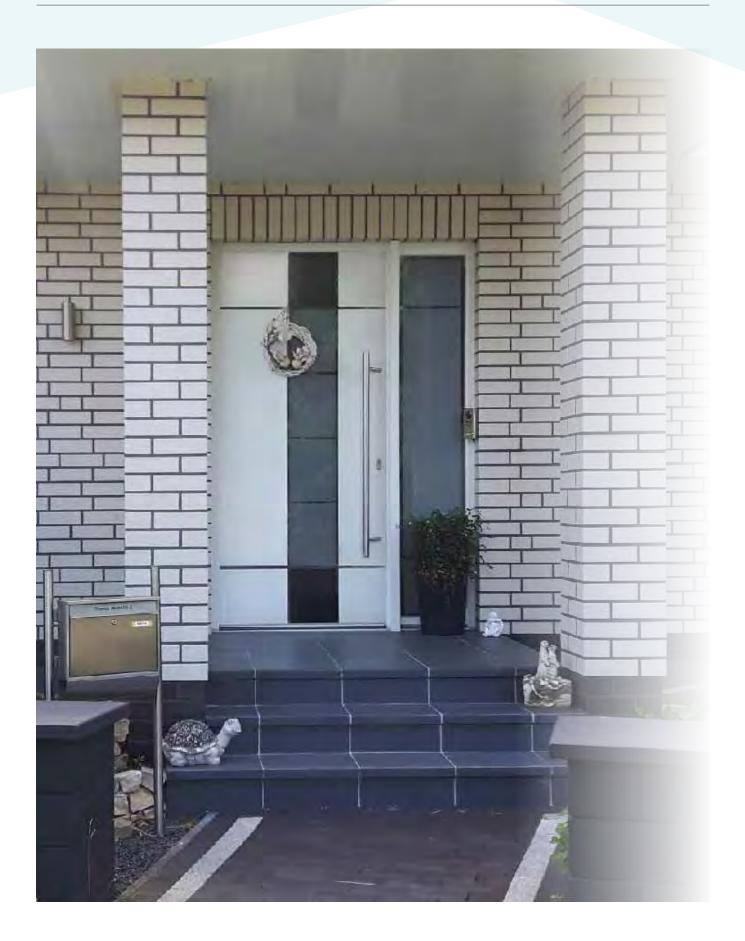






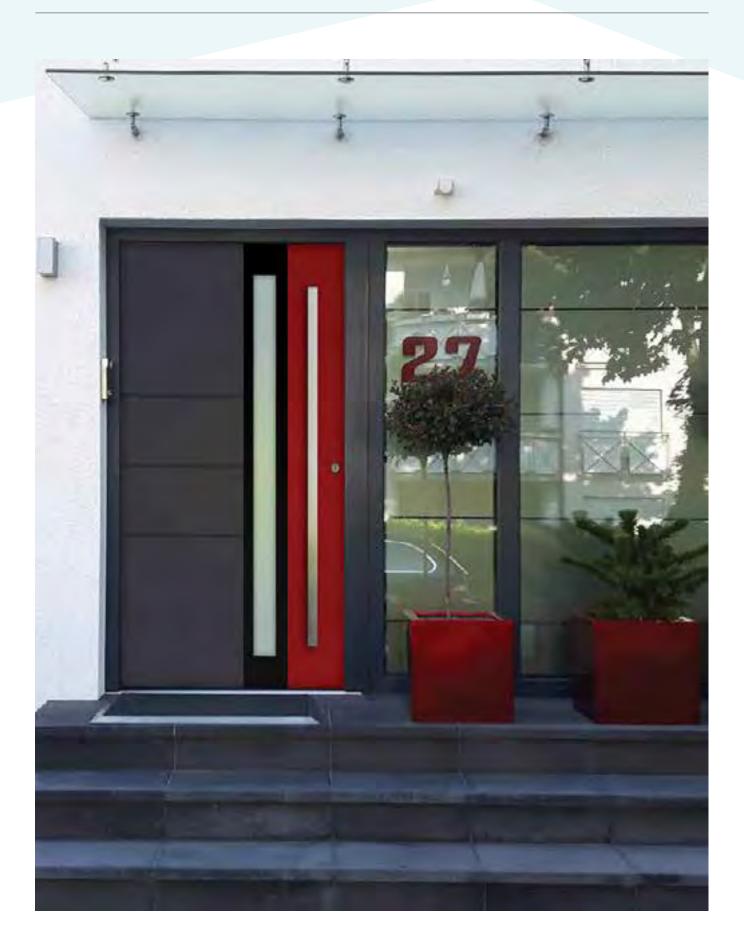

UP III

17

REST OF THE OFFER

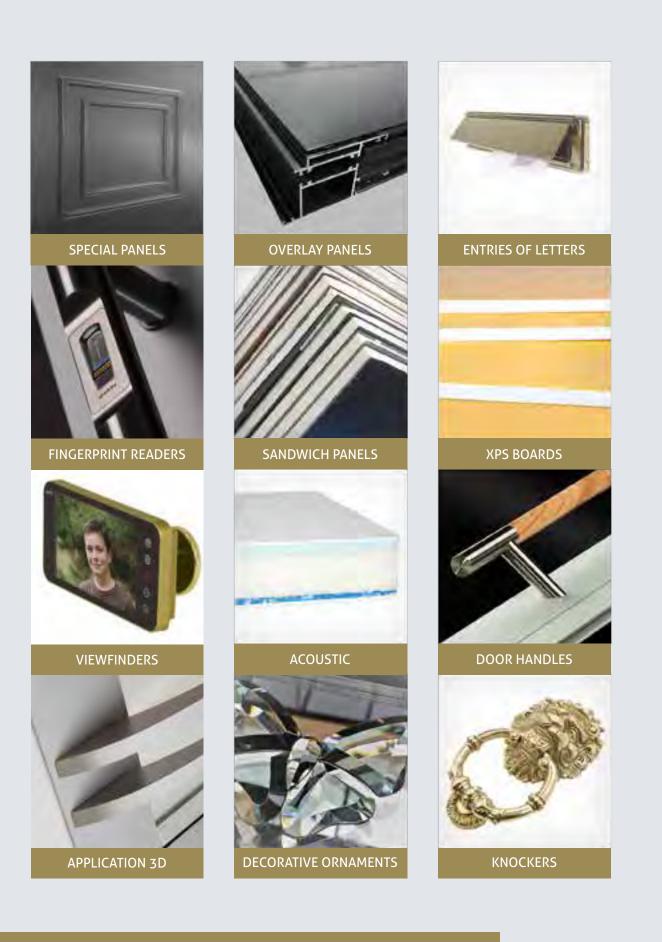

OVERLAY PANELS

SKETCHES OF OVERLAY PANELS ONE AND TWO SIDES AND INFILL PANEL.



INFILL

OVERLAY ONE SIDE

OVERLAY TWO SIDE



We created legible and clear instructions, for those who are interested to do the montage themself. We can provide formation and training to filling assembly installation. There is of course a possibility for every customer to use our support and advice with first ordered overlay.

1.00

PARAMETERS:

- BL-02(4)ST, BL-05(1)ST, BL-07(3)ST: standard dimensions 430 x 2000 x 24/28/36/44 mm
- BL-X1: standard dimensions 1020 x 880 x 24/28/36/44 mm
- NL/EK-41ST, NL/EK-19ST, NL/EK-16ST, EK-16(A)ST, EK-03(A)ST: standard dimensions 500 x 2000 x 24/28/36/44 mm.

THE OFFER IS INTENDED, FOR EXAMPLE, FOR SIDE FIXINGS AND PARTIAL DOOR FILLINGS.




















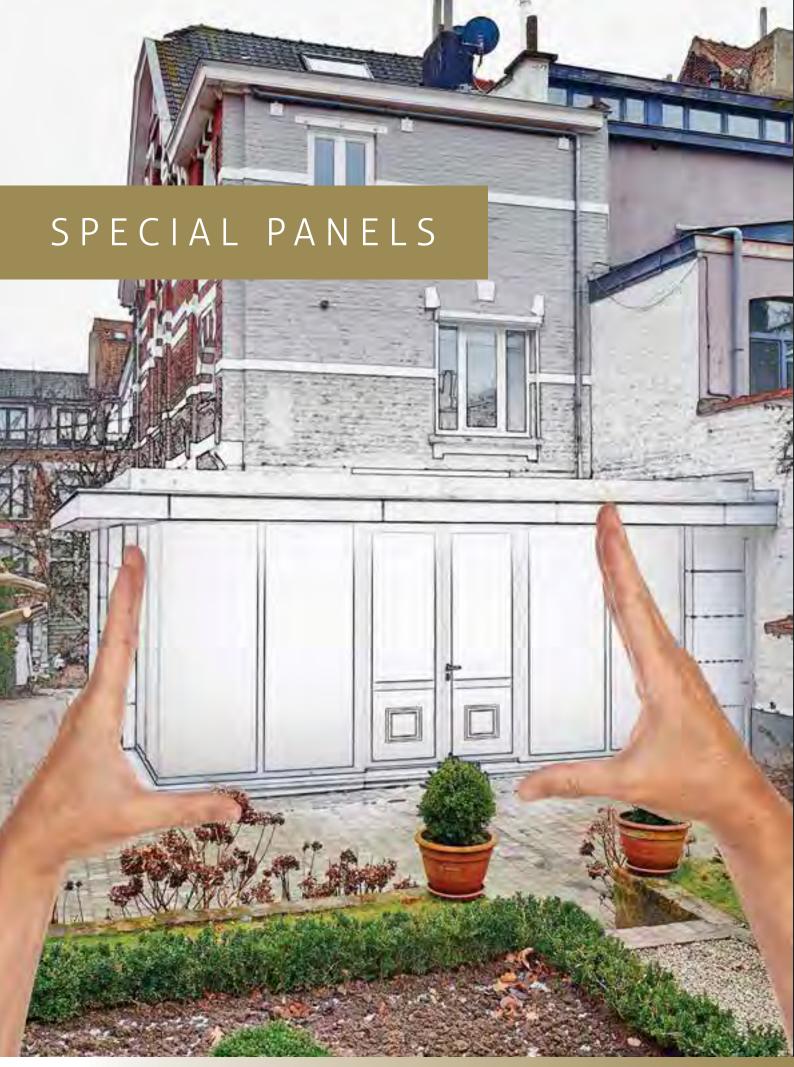

SANDWICH PANELS XPS BOARDS

SANDWICH PANELS

PARAMETERS OF SANDWICH PANELS:

- Core of the foamed polystyrene XPS;
- Any cladding: Aluminium with all the range of colors RAL, facing white PVC, HPL with any veneer RENOLIT, COVA or HORNSCHUCH;
- Standard dimensions: 2000 x 900 x 24 mm;
- Possibility of other thicknesses or dimensions as desired;
- Possibility to use an acoustic reinforcement to 38 dB;
- Possibility to apply reinforcement of aluminum plate;
- Use in the door, partition walls, etc.



Using the best components and having all approvals and certifications we give a five-years warranty on the panels, what makes us outstanding in the market. Plates with standard properties are produced within one day. We are the only company in Poland producing plates in white "Salamander" type, which is dedicated to contractors working on this system.



XPS BOARDS

PARAMETERS OF XPS BOARD WITH ADHESIVE FILM ON BOTH SIDES:

- Extruded polystyrene foam (XPS);
- XPS coated both sides with a special adhesive film;
- adhesive surfaces protected with silicone paper;
- Standard dimensions: 3000 x 1000 mm with thckness 6, 8, 13, 17, 20, 21, 24, 32, 34, 36, 40, 66 and 70 mm;
- Possibility of other thicknesses or dimensions as desired;
- Possibility to use an acoustic reinforcement to 38 dB;
- Possibility to apply reinforcement of aluminum plate;
- Use in the door, partition walls, etc.




ADVANTAGES OF XPS INSULATION BOARDS

- Excellent resistance to moisture;
- High resistance to rot and corrosion;
- Perfectly controlled compression strength;
- Ability to maintain permanent isolation;
- Improved closed cell structure and lack of voids in extruded polystyrene (XPS) results in excellent resistance to moisture penetration.

REINFORCEMENTS

It is possible for an additional charge to strengthen our panels. We use aluminium plate. They increase the stiffness of the filling (especially recommended for PVC), acoustic performance and security. In standard we propose a 2 mm thick plate but there is possiblity to ask thicker plate.







K N O C K E R S

Knockers are a classical and functionnable decoration adapted to every models and not only the traditional. Montage need a additional reinforcement.








LION

PATINA



ΚΝΟϹΚΕRS

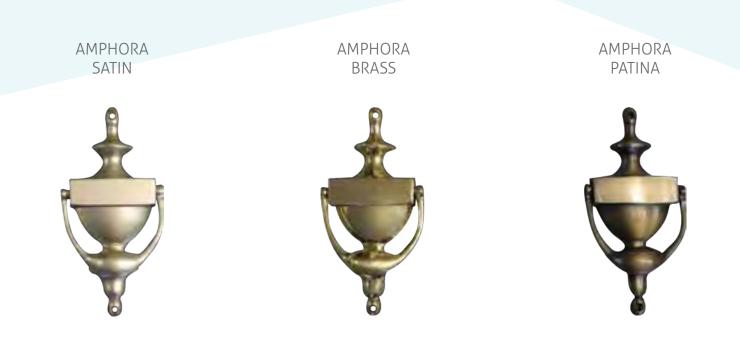

ENTRIES OF LETTERS BOX









We offer entries of letters box in aluminium in three colors: silver, white and gold. We propose the assembly of these entries in every models of our offers. You can assemble it yourself by following the instructions given in the box. Letterpads are designed for doors with thickness ranging from 36 to 70 mm. 3D convex elements are solid elements welded to the INOX application. Our decorations are characterized by exemplary workmanship and a modern shape that gives the door an extraordinary look. Thanks to such stainless steel properties as durability and nobility, we guarantee full customer satisfaction with purchased fillings. We can use them in models EK-04 (A), EK-04/6 (A), EK-17 (A), EK-18 (A), EK-02 (A), EK-44 (A), EK -45 (A), EK-51 (A). At the client's request, we can create individual projects within the proposed shapes (place for welding 3D applications, as well as the number of elements).



APPLICATION 3D IN STAINLESS STEEL



OFFER OF HANDLES IN STAINLESS STEEL

VP-10

VP-11

VP-12



Ø30 mm, one side, matt stainless steel, straight fixation



Ø30 mm, one side, matt stainless steel, fixation with angle 45°



Ø40 mm, one side, matt stainless steel, round and inclined handle

VP-13

VP-14

VP-15



40 mm x 20 mm, one side, matt stainless steel, straight square handle



40 mm x 20 mm, one side, matt stainless steel, straight handle, fixation 45°



40 mm x 20 mm, one side, matt stainless steel, straight handle, straight fixation

VP-16

VP-17

VP-18D



Ø30 mm, one side, matt stainless steel, tubular handle



Ø30 mm, one side, matt stainless steel, tubular handle



Ø30 mm, one side, matt stainless steel/wood, fixation 45°

VP-19D



Ø30 mm, one side, matt stainless steel/wood, straight fixation



VP-20



VP-22



Ø30 mm, one side, matt stainless steel, straight fixation



40 mm x 10 mm, one side, matt stainless steel, straight fixation



100 mm x 5 mm, one side, matt stainless steel





Warning: All recessed (pocket) pull handles can be installed in panels from **36 mm** thickness and more, except the VP-29, where the minimum thickness is **60 mm**.



VP-26

VP-27

VP-28







200 mm x 200 mm, matt stainless steel, pocket handle 200 mm x 250 mm, matt stainless steel, pocket handle 200 mm x 200 mm, matt stainless steel, pocket handle



VP-29



Embossed pocket handle, width 61 mm, matt stainless steel or aluminium painted with a RAL you choose

FINGERPRINT READER

The reader kit includes:

- Reader included: fingerprint scanner, ekey home CP IN plus control panel, AA cabling,
 B cabling (connects the panel with the power supply),
- Ekey C cable,
- Power Supply.



FINGERPRINT READER

The reader can be mounted anywhere on the door panel or on the door sash. On special orders, with individual price, it is possible to mount the reader in our selected handles: **VP-10**, **VP-11**, **VP-14**, **VP-15**, **VP-22**, **VP-23**.






ACOUSTIC

This offer is dedicated to customers who fill the door or partition with improved noise immunity with parameters:

- 38 dB: these solutions are used in sandwich panels and other series models without glazing. The minimum thickness needed to use this option is 40 mm;
- 43 dB: these solutions are used in sandwich panels and other series models without glazing.
 The maximum size of panel is 2000 x 1000 mm, the thickness: HOL and PVC 32/36/44 mm,
 ALU 31/35/43 mm;

"Veyna" company has already implemented many of this special orders in offices, theatres and hospitals.

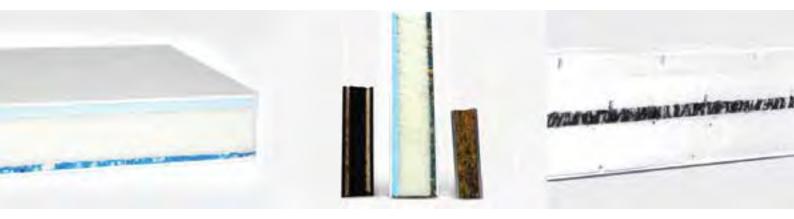



VIEWFINDERS

Viewfinders can be integrated into a panel with a thickness between 24 and 40 mm.



chrome silver viewfinder



chrome gold viewfinder

ELECTRONIC VIEWFINDER

Viewfinders with high resolution 4.0 HD, suitable for panels of thickness 42 to 72 mm



TYPES OF GLAZING

Company "Veyna" has in its offer a wide spectrum of ornaments which are most popular on the European market. Glass produced at Pilkington is a high quality product that guarantees best design. It is obviously possible to use any other kind of ornament and glass type however longer realisation time should be allowed for. It is possible to use extra decorative mullions between the glass, safety or heat protection glass.



silvit clear



cathedral clear



kura bronze



madera clear



master carre



master ligne



master ray



chinchilla



satinato

Rest of the glazing on www.veyna.pl

SAND GLASS

Sandblasting glass is the process whereby a specialized abrasive surface treatment of glass is applied leading to the removal of the top layer which results in visible tarnishing. The use of this technology gives a very delicate and subtle results. Sandblasting glass allows you to create any patterns that decorate the surface in a unique way. In addition to the designs shown below individually designs can be made on request.



THE ABOVE DESIGNS OF SANDBLASTED DOOR GLASSES ARE DEDICATED TO THE FOLLOWING MODELS:

EK-02(A)/ EK-44(A) / EK-45(A): SAND 01, SAND 02, SAND 03, SAND 08 EK-04(A) and EK-04/6(A): SAND 04, SAND 05, SAND 06 EK-05(A) and EK-15(A): SAND 07 EK-50(A) and EK-51(A): SAND 09

EXAMPLE OF REALIZATION






CENTRUMLASEROWE.PL



5 new colors in optic BRASS, SILVER and GOLD

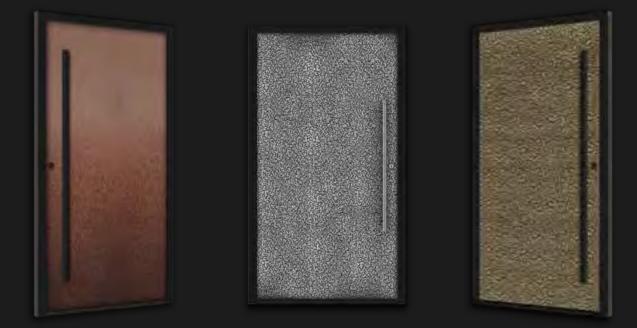

As well as RUST and MARBLE CONCRETE





COLORS AVAILABLE IN MOST MODELS